



Innovated Customized **Converting**

Providing the perfect solution for the flexible packaging market

WORLDLY INDUSTRIAL CO., LTD.

No.2, 7th Road, Taichung Industrial park, Taichung city, Taiwan 40755

TEL: 886-4-23599850 / 23599851

E-mail: welead@ms17.hinet.net

FAX: 886-4-23596625 / 23584485

sales@worldly.com.tw



<http://www.welead.com>

<http://www.worldly.com.tw>

WRP-HI

Computerized Rotogravure Printing Press



	HI	HHI		
Maximum Machine Speed	260 m/min	310 m/min	Printing Cylinder Circumference	350 mm ~ 900 mm
Printing Maximum Speed	250 m/min	300 m/min	Material Diameter	Ø600mm /Ø800 mm/Ø1000 mm
Printing Width	1,000 mm / 1,300 mm		Application:PET, CPP, PVC,OPP, PP, PE, Nylon	

WRP-MV

High Productivity Rotogravure Printing Press



Maximum Machine Speed	220 m/min	Printing Cylinder Circumference	350 mm ~ 900mm
Printing Maximum Speed	200 m/min	Material Diameter	Ø600 mm,Ø800 mm
Printing Width	1000 mm,1200 mm	Application:PET, CPP, PVC,OPP, PP, PE, Nylon	

WRP-AS

Standard Flexible Rotogravure printing Press



Maximum Machine Speed	200 m/min	Printing Cylinder Circumference	300 mm ~ 900 mm
Printing Maximum Speed	180 m/min	Material Diameter	Ø600 mm,Ø800 mm
Printing Width	1,000 mm / 1,200 mm	Application:PET, CPP, PVC,OPP, PP, PE, Nylon	

WAP


Aluminum Foil Printing Machine



Maximum Machine Speed	160 m/min	Printing Cylinder Circumference	400 mm ~ 800 mm
Printing Maximum Speed	120 m/min	Maximum Material Diameter	Ø600 mm
Printing Width	600 mm, 800 mm	Application: Aluminum Foil, PET, OPP	

WRC-AT

Aluminum Foil Coating Machine

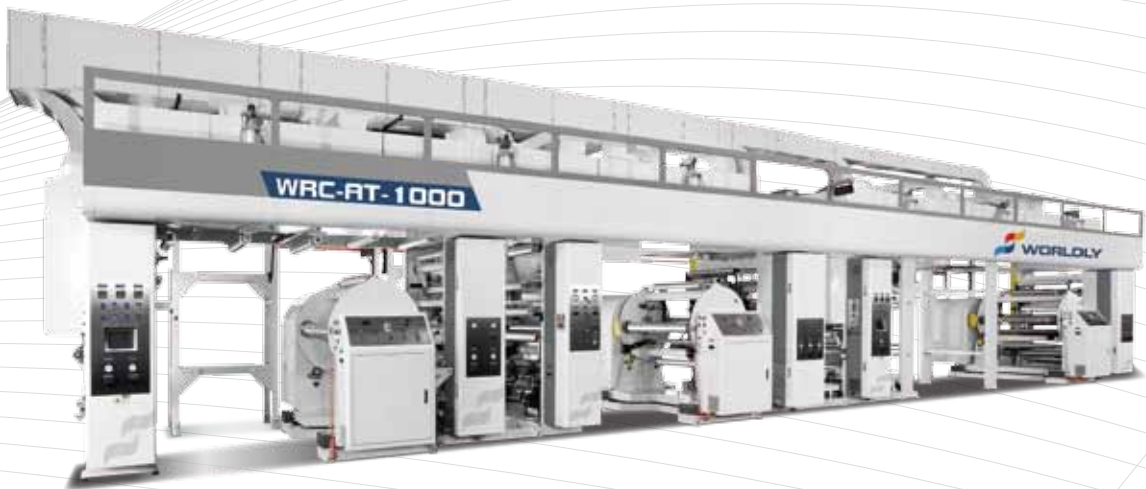

Maximum Machine Speed	150 m/min	Web Width	600 mm, 800 mm, 1000 mm
Coating Speed	120 m/min	Material Diameter	Ø600 mm
Application: Aluminum Foil, PET, OPP			

WRC

Rotogravure Coating Machine



Maximum Machine Speed	210 m/min	Web Width	1200 mm, 1600 mm, 2000 mm
Coating Speed	200 m/min	Material Diameter	Ø600 mm, Ø800 mm
Application: PET, OPP, PVC			

WDL

Dry Laminating Machine



Maximum Machine Speed	200 m/min	Web Width	1000 mm, 1200 mm
Laminating Speed	180 m/min	Material Diameter	Ø600 mm, Ø800 mm, Ø1000 mm
Application: PET, CPP, PVC, OPP, PP, PE, Nylon, Aluminum Foil, Paper			

WDSL

Solvent based & Solventless Laminating Machine Combi Type



Maximum Machine Speed	310 m/min	Web Width	1000mm, 1200 mm
Laminating Speed	300 m/min	Material Diameter	Ø800 mm
Application: PET, CPP, PVC, OPP, PP, PE, Nylon, Aluminum Foil, Paper			

WSL

Solventless Laminating Machine



Maximum Machine Speed	310 m/min	Web Width	1000mm, 1200mm
Laminating Speed	300 m/min	Material Diameter	Ø800 mm
Application: PET, CPP, PVC, OPP, PP, PE, Nylon, Aluminum Foil, Paper			

WEL**Extrusion Coating Laminating Machine**

Maximum Machine Speed	220 m/min	Web Width	1000 mm, 1200mm, 1300 mm
Laminating Speed	180 m/min	Material Diameter	Ø600 mm, Ø800 mm
Aluminum :PET, CPP, PVC, OPP, PP, PE, Nylon, Aluminum Foil, Paper			

WHM**Hot Melt Coating Laminating Machine**

Maximum Machine Speed	220 m/min	Web Width	1200 mm, 1600 mm, 2000mm
Laminating Speed	180 m/min	Material Diameter	Ø600 mm, Ø800 mm
Aluminum:PE, Non-woven, Breathable Film			

WSF**Film Sanding Machine**

Maximum Machine Speed	100 m/min
Web Width	800~1,500 mm
Material Diameter	Ø600 mm, Ø800 mm



Maximum Machine Speed	200 m/min
Web Width	1000~1,300 mm
Material Diameter	Ø600 mm, Ø800 mm

WCI

Cantilever Type Rewinding/Inspection Machines



Maximum Machine Speed	200 m/min
Web Width	300 mm
Web Diameter of Rewinder	Ø400 mm

WSM

Slitting Machine



Maximum Machine Speed	200 m/min, 300 m/min	Minimum Slit Width	50 mm
Web Width	1000~1,300 mm	Material Rewinder Diameter	Ø450 mm
Material Diameter	Ø600 mm, Ø800 mm		